

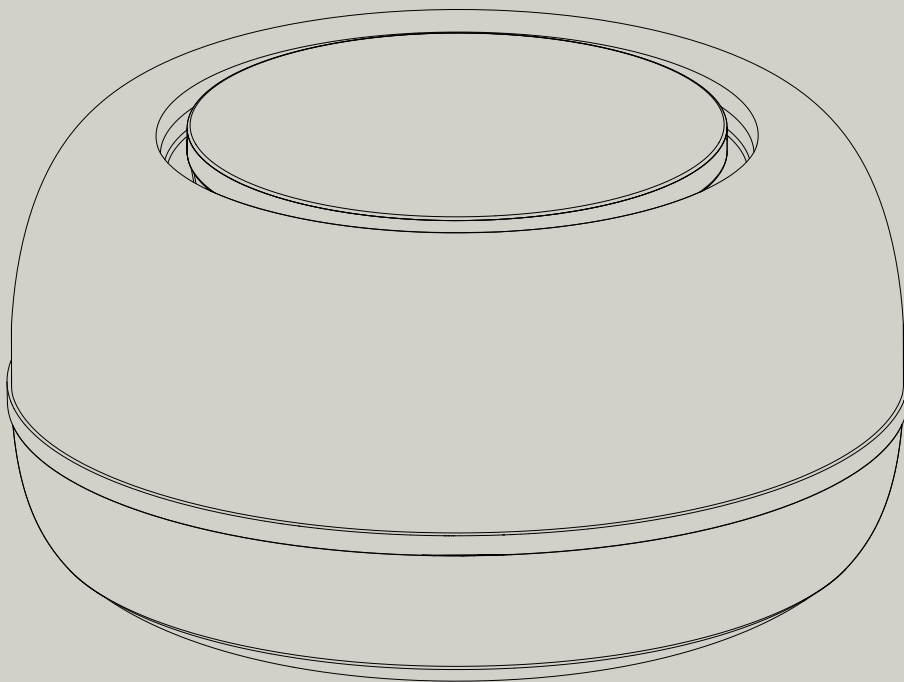


IRIS CABLE COLLECTOR⁰¹

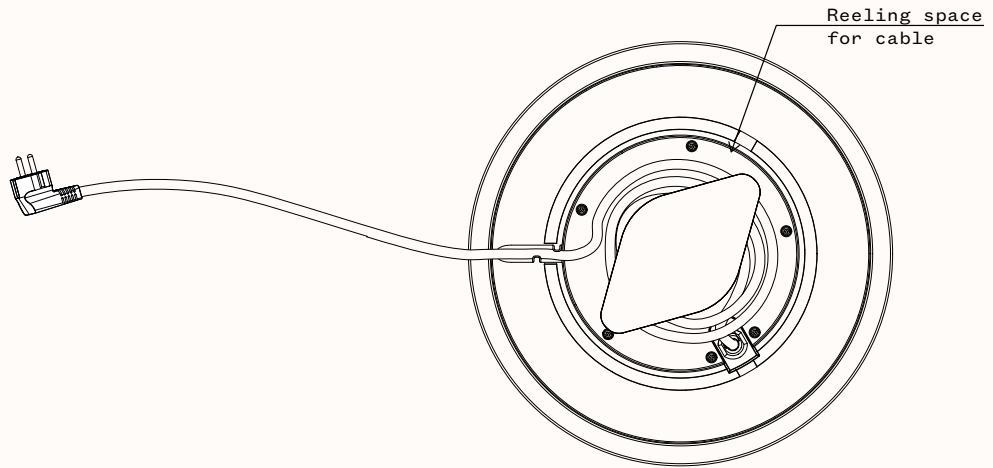


Dimensions


See user manual for assembly instructions.

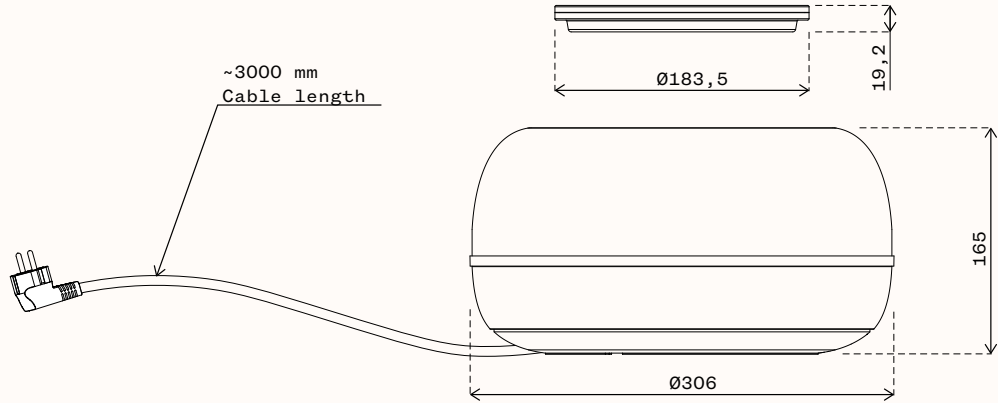

Top view without lid

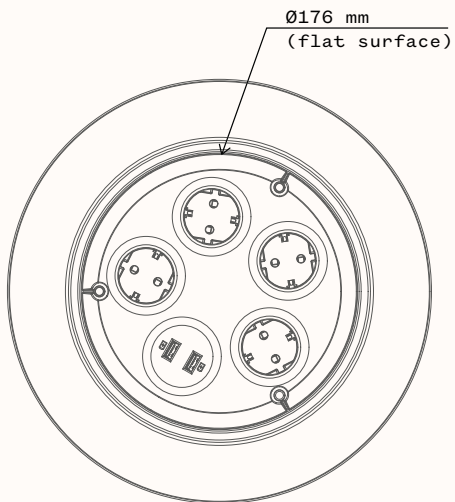

Top view with lid

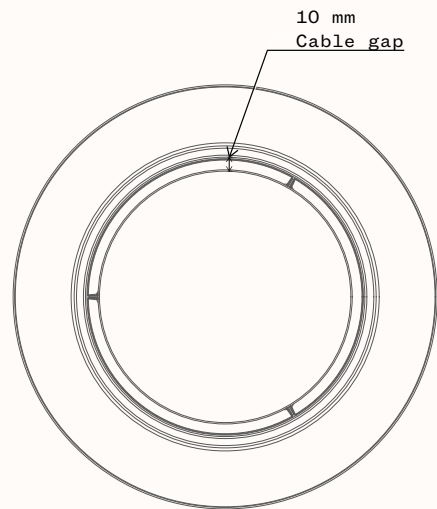

IRIS CABLE COLLECTOR⁰¹

4 SOCKET TYPE F, 2 USB-A CHARGER, MARBLE GREY/SOFT LINEN BEIGE

ART. NO

9451000102 MARBLE GREY
9451000103 SOFT LINEN BEIGE

Technical data

INTERFACE	4 SOCKET TYPE F, 2 USB-A CHARGER
RATED VOLTAGE	250V
RATED CURRENT	16A
OUTPUT W MAX	3680W (TYPE F SOCKET)
USB CHARGER SPECIFICATION	Type A QC2.0
USB CHARGER OUTPUT MAX	12W
USB CHARGER OUTPUT	5V 2A / 9V 1.2A / 12V 1A
CABLE & CONNECTOR	3x1,5mm ² , 3m, (CEE 7/7)
MATERIAL	PET/POLYAMID
PROTECTION CLASS	IP20
HEIGHT	165mm
DIAMETER	Ø306mm
CERTIFICATIONS	CE, RoHS COMPLIANT

Read before installation and usage



Do not cover

Electrical products may only be daisy-chained if integrated into a fixed installation. Normal power sockets may not be used for the connection to further socket rails.



Electronic equipment is recyclable and should not be disposed of with household waste, if the device has reached the end of its life, dispose of at the recycling points in accordance with local regulations. Disposal with household waste is prohibited



The device may only be used in a dry indoor environment.



Incorrect installation may endanger:

- Safety of the installer
 - Safety of the end-user and safety of the property.
- Incorrect installation may result in personal liability for damage of property or injury to persons.

For safe installation please ensure the following:

- The 5 safety rules to apply: Disconnect mains; Prevent reconnection; Test for absence of harmful voltages; Ground and short circuits; Cover or close off nearby live parts;
- Choose proper tools, measuring devices and personal protective equipment
- Analyse measured results
- Selection of electrical installation material to ensure switch-off conditions
- IP protection ratings
- Fitting of electrical installation material;
- Type of the feeding system (TN system, IT system, TT system...) and the resulting switching conditions (classic zeroing, protective earthing, necessary additional measures, etc.).



RoHS
Compliant