


# MK-2400-S1 & MK-2400-S2

Magnetic contact

VANDERBILT

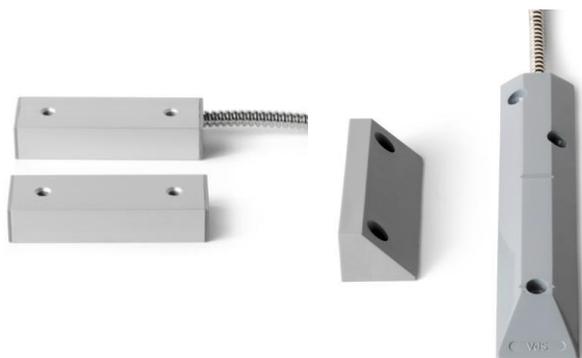

## Key Features include:


- Robust housing made from Aluminum and polyimide
- Metal tube for cable protection
- Ingress protection to IP67
- Good long term stability
- Fast and efficient mounting

# MK-2400-S1 & MK-2400-S2


Magnetic contact

**VANDERBILT**

MK-2400-S1

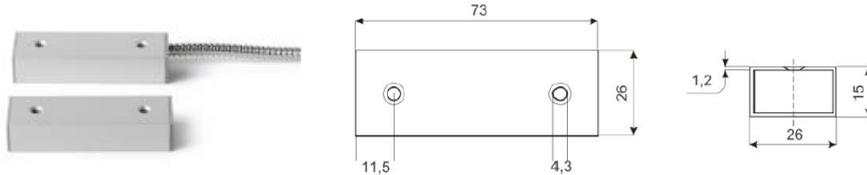

MK-2400-S2

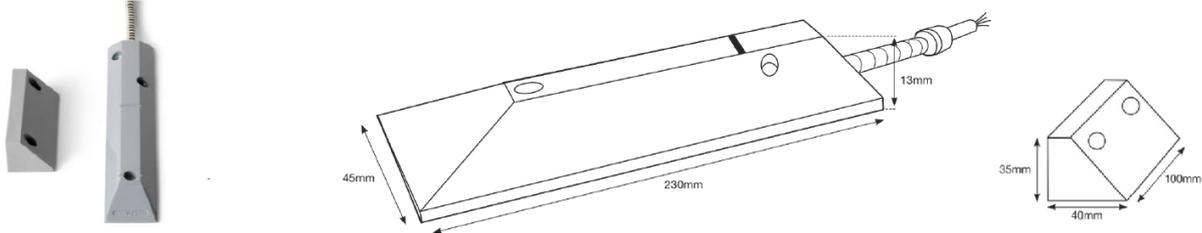

## ■ Technical Specifications

Line contact	Single pole, NC contact
Operating voltage	≤40V DC
Contact capacity	≤ 6W
Switching voltage	≤ 100V DC
Switching current	≤ 500mA
Transition resistance	≤ 0.15 Ohm
Environmental	
- Operating temperature	-40 ... +70 °C
- Environmental class VdS/EN	III/IIIA
- Housing protection	IP67
Approvals	VdS, EN, SBSC

## ■ Ordering information

Type	Art.-No.	Description	Weight
MK-2400-S1	V54536-F104-A100	Magnetic contact, 6m cable, 1m metal tube	0.216Kg
MK-2400-S2	V54536-F104-A200	Magnetic contact S2, 6m cable, 0.5m metal tube	0.44Kg

Issued by  
Vanderbilt  
Clonshaugh Business and  
Technology Park  
Clonshaugh  
Dublin 17  
Ireland  
www.vanderbiltindustries.com

Data and design subject to change without notice.  
Supply subject to availability.

**VANDERBILT**