



Structured Cable Products™

Quality Installations Deserve Quality Products


www.scp5e.com
 sales@scp5e.com
 Direct: 954-327-5770
 Toll Free: 866-470-5742

SCP PART#: SP-1.5/2-LSZH-WT UPC: 817777015317

DESCRIPTION:

COMMERCIAL SPEAKER CABLE - B2ca RATED - 2 COND/1.5mm² (16awg) 30x0.25mm (STANDARD CLASS 5) OXYGEN FREE COPPER, EN50575:2014 B2ca-s1a,d1,a1 LOW SMOKE ZERO HALOGEN - WHITE JKT- 305M/1000FT SPOOL

Conductor 30*0.25±0.008mm Bared copper
 Insulation LSZH
 OD:2.20±0.05mm
 Color: Red,Black
 Cabling Color: Red- Black
 Rip-cord Stranded rip-cord
 Jacket LSZH
 Thickness: 0.7mm Nom.
 Color :White(RAL9003)
 O.D.:5.8±0.2mm

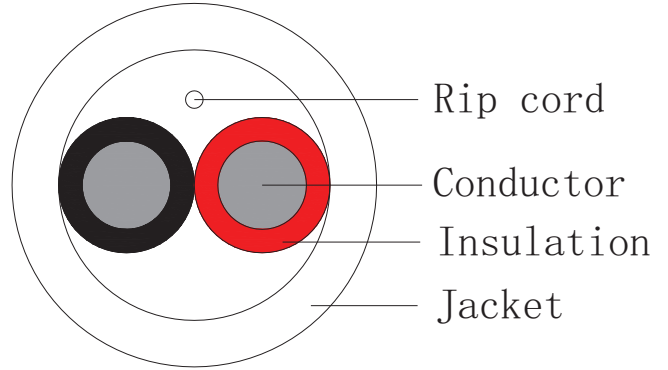

Marking: STRUCTURED CABLE PRODUCTS -- SP-1.5/2-LSZH -- 2C/1.50mm² (16AWG) 30x0.25mm
 STRAND OXYGEN FREE COPPER LSZH JKT EN50575:2014 CE B2ca-s1a,d1,a1 RoHS
 ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M MM/YY

NOTE: ***m means continuous length.

Sheath Physical Properties

| | | |
|---------------|-----------------------|--------|
| Before Aging: | Tensile Strength(Mpa) | ≥ 10.0 |
| | Elongation(%) | ≥ 125 |
| Aging Period: | 100℃ × 168h | |
| After Aging : | Tensile Strength(Mpa) | ≥ 8.0 |
| | Elongation(%) | ≥ 100 |

Electrical Characteristics(20℃)

Conductor DC Resistance: ≤ 13.7Ω/km

Other Characteristics

Minimum Installation Temperature: -20℃
 Operating Temperature Range: -20℃ ~+80℃
 Rated Voltage: 300V
 Minimum Bend Radius: 8 × O.D.

Packing Information

Packing length: 305m(1000ft)
 Packaging: Wooden Reel;
 Packing Weight: N.W. 15.9kgs , G.W. 16.90kgs
 Dimension: 37cm x 37cm x20cm
 45 reels each pallet

Revised by J. Klucar