

Outdoor Large Camera Enclosure

ES-HD-HWS-LG
ES-HD-CWS-LG






The outdoor high definition camera enclosure ensures total protection against all environmental conditions. The side opening provides easy access to the camera and cables. Included with the enclosure is the cable-managed bracket and sunshield.

The enclosure is constructed from aluminum, and the sunshield is constructed from ABS plastic for strength and durability in all applications. The enclosure also uses neoprene-rubber gaskets and sealing rings to ensure maximum weatherproofing.

KEY FEATURES

- Outdoor weatherproof enclosure for H5 Pro Cameras, H5A HD Cameras, H4 HD Cameras, and H4 Pro Cameras
- Glass window offers excellent image quality
- Includes cable managed bracket and sunshield
- Heating or cooling options available
- Compatible with optional PoE + power module
- Finished in RAL 9002 color

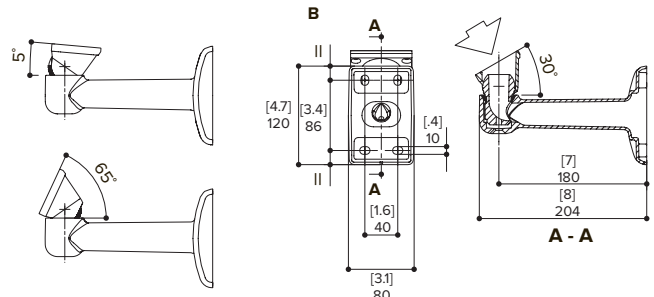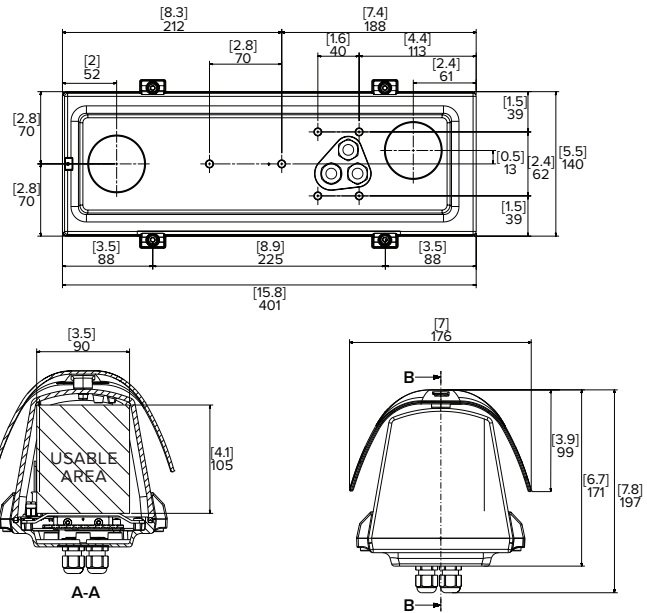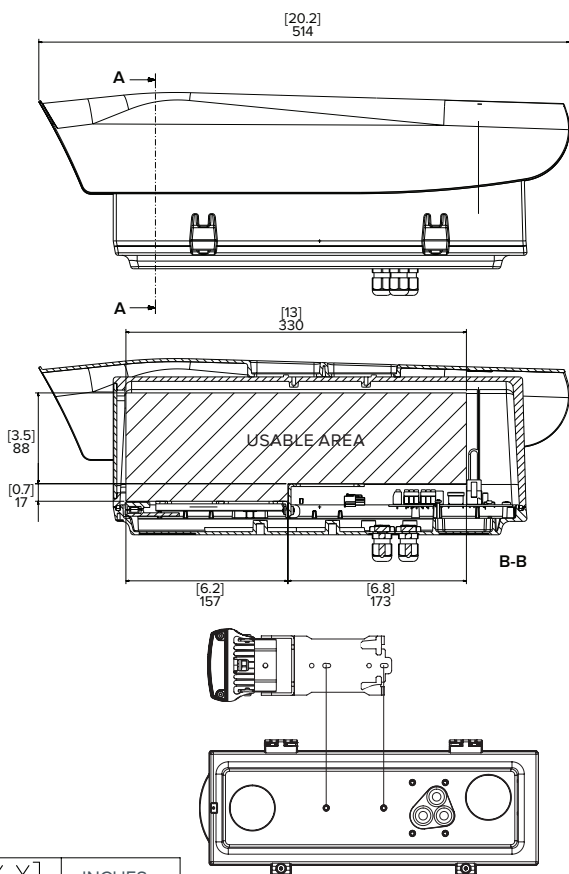

[X.X]	INCHES
X	MM

Specifications

MECHANICAL	Dimensions (W x H x L)	176 mm x 197 mm x 514 mm (6.9" x 7.8" x 20.2")
	Internal usable area (W x H x L)	90 mm x 115 mm x 325 mm (3.5" x 4.5" x 12.8")
	Weight	4.8 kg (10.6 lbs)
	Window Material	Glass
	Finish	RAL 9002

ELECTRICAL	Power Consumption	20 W — ES-HD-HWS-LG 4 W — ES-HD-CWS-LG
	Power Source	VDC: 12 V VAC: 24 V

ENVIRONMENTAL		ES-HD-HWS-LG	ES-HD-CWS-LG
		Supported Camera and Operating Temperature	H5 PRO cameras (H5PRO-B): -40°C to 55°C (-40°F to 131°F) H5A HD cameras (H5A-B): -10°C to 48°C (14°F to 118°F) H.264 H4 PRO cameras (H4PRO-B): -15°C to 37°C (5°F to 99°F) H4 HD cameras (H4A-B): -10°C to 48°C (14°F to 118°F)
	Heater Operation	On: 15°C ±3°C (59°F ±5°F) Off: 22°C ±3°C (71°F ±5°F)	n/a
	Cooler Operation	n/a	On: 35°C ±3°C (95°F ±5°F) Off: 20°C ±3°C (71°F ±5°F)

CERTIFICATIONS	Safety	CE EN 60950-1	EN50130-4 EN61000-6-3
	Environmental	IP66 – ES-HD-HWS-LG IP44 – ES-HD-CWS-LG	Resistant to salt fog (EN50130-5, EN60068-2-52)

AVAILABLE ACCESSORIES	ES-HD-IPM	PoE+ input power module retrofit kit.
	ES-HD-MNT-PAR	Parapet mounting arm
	ES-HD-MNT-POLE-LG	Large pole mount adapter
	ES-HD-MNT-POLE-MD	Medium pole mount dual camera adapter
	ES-HD-MNT-POLE-SM	Small pole mount dual camera adapter bracket
	ES-HD-MNT-ARM	Ceiling mounting arm
	ES-HD-MNT-CORNER	Corner mount adapter, compatible with supplied ball joint bracket
	ES-HD-MNT-PLATE	Reinforcing support wall plate, second camera mounting point for ES-HD-MNT-POLE-MD

ORDERING INFORMATION	ES-HD-HWS-LG	Outdoor, weatherproof large enclosure with heater
	ES-HD-CWS-LG	Outdoor weatherproof large enclosure with cooling fan