


## DOCK310EUZ

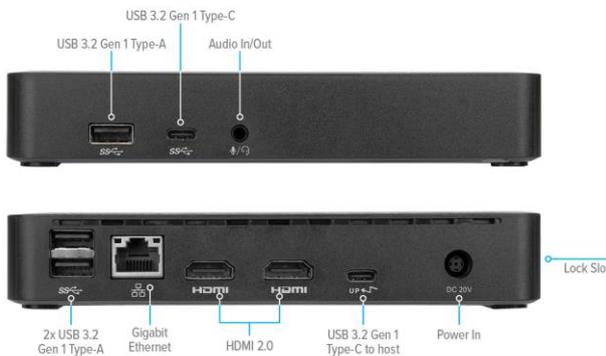

**Targus® Universal USB-C DV4K Docking Station with 65W Power Delivery**

### Dock connection type to host device

Connector type	USB-C / USB-A via adaptor (included)
Connector technology	USB 3.2 Gen 1
Graphics Technology	DisplayLink

### Host port compatibility

USB 3	•
USB 4	•
Thunderbolt 3	•
Thunderbolt 4	•

### Video ports

HDMI	2
Display Port	--
VGA	--
Video via High-speed USB / Thunderbolt port	--
Maximum no. of monitor(s)	2
Maximum resolution (single monitor)	5K
Maximum resolution (multi-monitor)	2 x 4K @ 60 Hz
HDR via HDMI	--

### Connection Ports

USB-A (Max data speed)	3 (4.5 W per port / 5 Gbps)
USB-C (Power Delivery / Max data speed)	2 - 1 to host (65 W PD / 5 Gbps), 1 (7.5 W / 5 Gbps)
Thunderbolt 3	--
Thunderbolt 4	--
RJ45 Ethernet	Gigabit Ethernet
3.5 mm Audio	•
Other audio ports	--
Memory cards	--

### What's in the Box:



- UK and EU AC power cords 1.8 m
- Quick Start Guide
- AC Adapter, AC to DC output - 20 V, 5 A, 100 W
- DOCK310
- 1 m USB-C to USB-C Cable with screw mount and USB-C to USB-A tether adapter

### Power

USB Power Delivery	• - when host device is connected using USB-C via included cable to DOCK's USB-C [to host] PD port only*
--------------------	---

### Legacy laptop power connectors

Max. power pass-thru / Max. power delivery to host	No Guaranteed up to 65 W to host device
Power required for operation and charging	100 W Power adapter included

### Host system OS compatibility

Works with Windows®	•
Works with MacOS®	•
Works with ChromeOS®	•
Works with iOS®	--
Works with Android®	•
Works with Samsung DEX	--
Works With Linux Ubuntu™	•

### Device compatibility

Windows® Laptop	•
Microsoft Surface® Laptop	•
ChromeBook®	•
Apple iMac®	•
Apple MacBook Pro® / Air® 2016 - 2019	•
Apple MacBook Pro® / Air® M1 / M2 2020 - 2022	•
Apple MacBook Pro® M1 / M2 Pro / Max 2021 - 2023	•
Apple iPad Pro® 2018 or later	--
Apple iPad Air® 2020 or later	--
Android® Tablet	•
Android® Smartphone	•

### Targus MiraLogic™ features

Auto discover peripherals	--
Auto inventory peripherals	--
Remote IT management	--
Data security	--
Bluetooth® Mesh network	--
MiraLogic™ Smart Sensor	--
MiraLogic™ Smart Power Strip	--

### Other features

On/ Off Switch	•
PXE Boot	•
Wake-on LAN	•
LAN/ WLAN Switching	•
Mac Address passthru	•
Security cable lock slot	•
Compatible cable locks	• - Targus PA410 series, ASP9 series
Aluminium/ metal alloy construction	--
VESA mount compatible	• - Targus ACX003GLZ
USB-C [to host device] port screw mount	• - Compatible with Targus ACC1133GLX, ACC1135GLX
Warranty	3 years

### Dimensions

Length x Width x Height (cm)	16.6 x 8.3 x 3.0 cm
Weight (kg)	0.3 Kg