


HALO Series All In One Video Bar

HALO VX10 v2



Specification Sheet

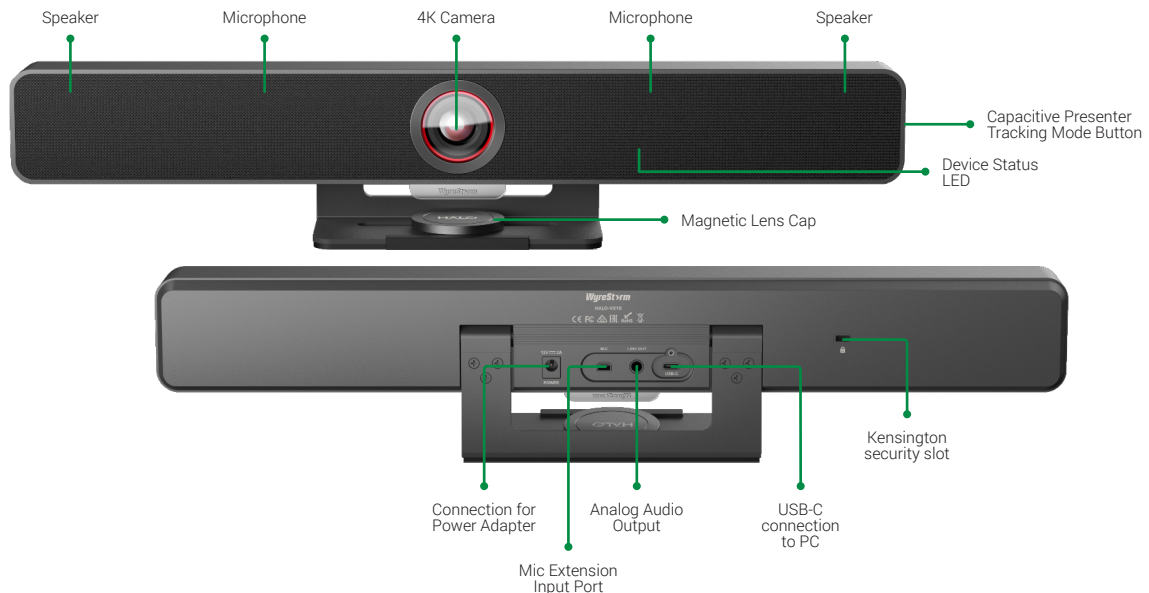

WyreStorm - Powerful. Reliable. Simple.

Introduction

The Halo VX10, part of the Halo series of WyreStorm Office products, are designed for small to medium sized meeting rooms, huddle spaces and the ever-growing home office. The VX10 is a quality video bar that integrates a speakerphone and camera into one device. Simple plug-and-play installation gives the presenter access to a wide angle 4K camera with enhanced features including presenter & speaker tracking, auto framing and anti-flicker. The microphone offers superior audio pickup at any angle of the room, all while canceling unnecessary noise with its built in Acoustic Echo Cancellation technology. Lastly, the built in speaker boasts two 5 watt speakers, filling the room for a crystal clear and accurate audio experience.

Key Features

- Wide angle 4K video camera with 120° FOV
- 4x MEMS digital microphone arrays with a range of 3 ~ 5 meters and an angle of 180°
- 2x 3W Stereo full range speakers with passive radiator bass enhancement.
- Includes AEC (Acoustic Echo Cancellation), AGC (Automatic Gain Control), ANS (Automatic Noise Suppression) and full duplex mode communication
- to make all participants feel like they are in the same room.
- Auto Framing / Speaker Tracking / Presenter Tracking based on AI technology makes meetings more intimate and friendly.
- Plug and play with excellent compatibility for OS and UC applications, such as Zoom, WebEx, Tencent meeting, Teams, etc.
- Provides Windows App for easy control

In the Box

- | | |
|--------------------------------------|----------------------|
| 1x HALO VX10 Video Bar | 1x Wall Mount Kit |
| 1x 5m USB-C to USB A Cable | 1x Magnetic Lens Cap |
| 1x 12V DC Power Supply (UK/US/EU/AU) | 1x QuickStart Guide |

Specifications

Audio and Video	
Inputs/Outputs	1x USB-C Input 1x USB-B Input 1x 3.5mm Audio Out
Speakerphone	
Microphone	4x MEMS mic array, AEC ANS Pickup Range: 180° up to 5m
Speaker	2x 3 Watt
Camera	
Sensor	1/2.8", CMOS, Effective Pixel: 8.0M
Video Resolution Max.	3840x2160p @30Hz 1920x1080 @60Hz 1280x720 @90Hz
Output Encoding	MJPEG/YUV2/H.264/H.265 UVA UVC 1.1
FOV	120°
Additional Features	White Balance: Auto Backlight Compensation: Auto DNR: 2D & 3D ePTZ: Supported 5x digital zoom Presenter Tracking: Supported Speaker Tracking: Supported Auto-Framing: Supported
Communication and Control	
Control Option	Controlled via App
Power	
Power Supply	12V DC 2A
Max Power Consumption	6W
Environmental	
Operating Temperature	0 ~ +40°C (32 ~ +104 °F), 10% ~ 90%, non-condensing
Storage Temperature	-20 to +60°C (-4 to + 140°F), 10% to 90%, non-condensing
Maximum BTU	20.47 BTU/hr
Dimensions and Weight	
Height	97.5mm/3.85in (with stand)
Width	460mm/18in
Depth	61mm/2.4in
Weight	0.81kg/1.78lbs
Regulatory	
Safety and Emission	CE FCC RoHS EAC RCM

Note: WyreStorm reserves the right to change product specification, appearance or dimensions of this product at any time without prior notice.